


KENOVEL

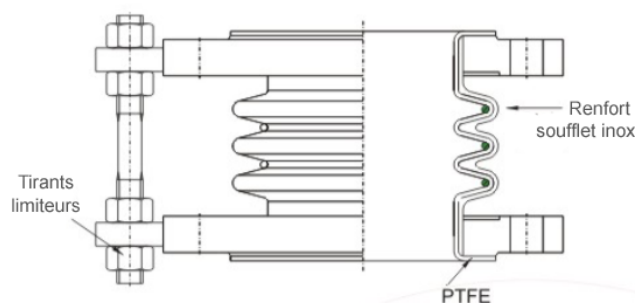

Compensateur PTFE soufflet inox

DN50 - DN2200

DN	L	Mouvement axial (+/-mm)			Raideur axiale (N/mm)		
		6 bar	10 bar	16 bar	6 bar	10 bar	16 bar
50 / 2"	100	15	12	10	209	467	859
65 / 2"1/2	110	16	12	9	216	568	1100
80 / 3"	120	16	12	9	304	676	1287
100 / 4"	120	19	15	12	466	831	1393
125 / 5"	130	19	15	12	533	996	1682
150 / 6"	140	18	15	12	637	1170	1980
200 / 8"	150	36	29	24	427	702	1345
250 / 10"	160	36	38	23	510	851	1649
300 / 12"	170	45	36	30	442	724	1384
350 / 14"	180	45	36	29	475	784	1508
400 / 16"	200	44	35	28	530	882	1708
450 / 18"	200	44	34	28	582	980	1902
500 / 20"	220	43	34	28	640	1079	2102
600 / 24"	240	73	50	38	540	1463	3202
700 / 28"	280	73	48	40	290	815	1463
800 / 32"	280	74	47	40	310	875	1585
900 / 36"	300	74	46	39	333	985	1708
1000 / 40"	300	78	44	34	368	1563	4044
1200 / 48"	320	76	43		425	1843	
1400 / 56"	320	74	42		485	2128	
1600 / 64"	360	72	42		545	2410	
1800 / 72"	360	71	35		605	5218	
2000 / 80"	380	66	39		943	4173	
2200 / 88"	380	65	34		1027	7833	

Caractéristiques pouvant être modifiées
Reproduction interdite